

## TABLE OF CONTENTS



<b>Biography</b> .....	5	<b>Brake Force and Corner Weight</b> .....	37
<b>Acknowledgments</b> .....	5	<b>Perfect Balance</b> .....	38
<b>Dedication</b> .....	6	<b>Static Weight Distribution</b> .....	39
<b>Foreword</b> .....	6	<b>The Second Law of Motion</b> .....	39
<b>Introduction</b> .....	7	<b>Dynamic Weight Distribution</b> .....	40
<b>Chapter 1: Energy Conversion</b> .....	9	<b>The Benefits of Perfect Balance</b> .....	41
The Conservation of Energy .....	9	<b>Front Brake Bias</b> .....	43
Where Energy Comes From .....	10	<b>Rear Brake Bias</b> .....	43
Friction .....	10	<b>Measuring Brake Balance</b> .....	44
Kinetic Energy .....	11	<b>Changing Brake Balance</b> .....	44
Potential Energy .....	13	<b>Chapter 5: Pedals, Boosters</b>	
Energy Transformation .....	14	<b>and Master Cylinders</b> .....	46
Energy and the Brake System .....	14	Brake Pedal Components .....	46
Calculating Brake System Temperature .....	15	OEM Brake Pedals .....	47
Importance of Brake Sizing .....	15	Racing Brake Pedals .....	48
<b>Chapter 2: Tires Stop the Car</b> .....	18	Brake Boosters .....	48
The First Law of Motion .....	18	Vacuum Boosters .....	48
Brake Forces .....	18	Hydraulic Boosters .....	50
Tire Slip .....	19	Master Cylinders .....	50
How Brake Forces are Generated .....	20	Master Cylinder Selection .....	52
The Mu-Slip Curve .....	22	Rear Brake Pressure Reduction .....	54
Choosing the Best Tires .....	24	Balance Bars .....	54
Calculating Maximum Deceleration .....	25	Proportioning Valves .....	55
<b>Chapter 3: Brake System Design</b> .....	27	<b>Chapter 6: Brake Fluid</b> .....	58
Driver Applied Force .....	27	Brake Fluid 101 .....	58
Brake System Overview .....	28	FMVSS116 .....	58
Brake Corner Gain .....	33	Dry Boiling Point .....	60
Summing Forces .....	34	Wet Boiling Point .....	61
Overall Brake System Gain .....	34	Water Adsorption .....	61
Calculating Deceleration .....	34	DOT Ratings .....	61
Calculating Stopping Distance .....	34	Brake Fluid Compatibility .....	64
Brake System Modifications .....	35	Brake Fluid Maintenance .....	64
<b>Chapter 4: Brake Balance</b> .....	37	Brake Bleeding .....	65
		<b>Chapter 7: Brake Lines and Hoses</b> .....	69

# TABLE OF CONTENTS



Hydraulic Circuit Design	69		
Brake Lines	70		
Flare Fittings	70		
Brake Hoses	71		
Banjo Fittings	72		
Stainless Steel Brake Hoses	73		
<b>Chapter 8: Brake Calipers</b>	<b>76</b>	<b>Chapter 11: Sports Car Brake Upgrade</b>	<b>118</b>
Hydraulic Gain	76	The Vehicle	119
Caliper Components	76	The Objective	119
Taper Wear	79	Picking the Right Parts	119
Piston Count	81	Bolting Them On	121
Caliper Mounting	82	The Results	124
One-Piece (Monoblock) Calipers	84		
Two-Piece Calipers	84	<b>Chapter 12: Racecar Brake Upgrade</b>	<b>126</b>
Knockback	84	The Vehicle	127
		The Objective	127
<b>Chapter 9: Brake Pads</b>	<b>88</b>	Front Brake Upgrade	127
Brake Pad Terminology	88	Rear Brake Upgrade	129
Coefficient of Friction	90	Apply System Upgrade	131
Coefficient of Friction Stability	91	Hoses, Fluids, and Pads	132
Brake Pad Fade	91	The Results	132
Friction Material Categories	92		
Friction Material Chemistries	93	<b>Chapter 13: Muscle Car Brake Upgrade</b>	<b>133</b>
Friction Mechanisms	96	The Vehicle	133
Brake System Break-In	97	The Objective	134
		Drum Brakes 101	134
<b>Chapter 10: Brake Rotors</b>	<b>100</b>	Picking The Right Parts	134
A Rotor Refresher	100	Bolting Them On	135
Rotor Terminology	101	Buttoning it Up	138
Effective Radius	103	The Results	138
Rotor Sizing	103		
Static Weight and Rotational Inertia	103	<b>Chapter 14: Hot Rod Brake Upgrade</b>	<b>139</b>
Rotor Cooling	104	The Vehicle	139
One-Piece (Fixed) Rotors	107	The Objective	139
Two-Piece (Floating) Rotors	107	Front Brake Upgrade	139
Solid Rotors	109	Brake Pedal Considerations	140
Vented Rotors	110	Master Cylinder Upgrade	142
Cross-Drilled Rotors	111	Brake Line and Proportioning	
Slotted Rotors	112	Valve Installation	142
Rotor Inspection	113	Brake Hoses	143
Thickness Variation	115	Brake Fluid Selection	143
		Parking Brake Installation	144
		The Results	144



# PEDALS, BOOSTERS AND MASTER CYLINDERS

The apply system (sometimes called the actuation system) exists in order to amplify the driver's leg force and then convert it into hydraulic fluid pressure. In nearly all cases, the apply system functionality is not assigned to a single device. Instead, most apply systems accomplish this task by dividing the total responsibility among several discrete components.



*Most brake pedal pads are constructed from steel with textured molded rubber covers. The pedal shown here is actually made from cast aluminum for weight savings. Regardless of the aesthetic impact, the material of the pad itself doesn't impact the brake pedal output. (Randall Shafer)*

While there are many different types of apply systems, most conventional vehicles use a combination of brake pedals, brake boosters, and master cylinders to get the job done. Variations on this recipe abound, but the fundamental objective remains the same: increase the applied force and turn it into pressure.

There is, however, one addendum. As you just learned in Chapter 4, brake pressure distribution between the front brakes and rear brakes can be used to optimize a vehicle's brake balance. Consequently, the apply system may also contain additional devices which limit, regulate, or proportion the rear brake line pressure.

The pages that follow walk through these various components in detail, starting with the driver's primary interface to the brake system: the brake pedal.


## Brake Pedal Components

The brake pedal's primary role is to mechanically increase the force exerted by the driver's leg on the brake pedal pad. Remember, it's essentially the amplified force from the driver's leg that creates slip at the tire contact patches.

The brake pedal accomplishes this task as a direct result of its lever-based geometry. There are many different designs available, but all rely on the following series of individual components to get the job done.

## Brake Pedal Pad

The *brake pedal pad* is simply where the driver provides mechanical force input to the brake system. Most OEM systems use a ribbed rubber pad molded over a steel or composite core, but exotic-looking brake pedal pads made from cast aluminum and/or with weight-saving holes

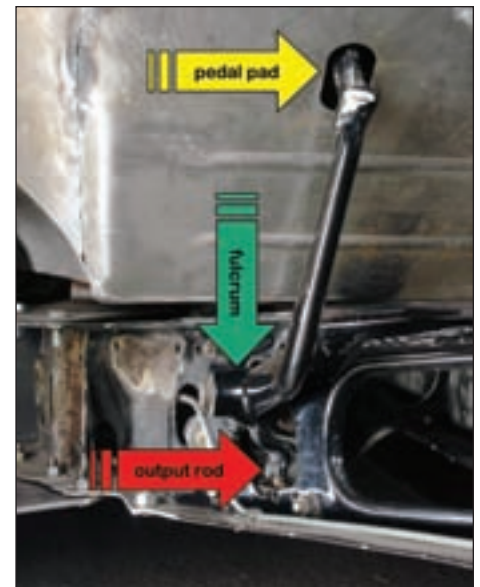

*In most modern production vehicles, the brake pedal fulcrum is located at one end of the brake pedal arm. However, in many hot rod applications, the fulcrum (green arrow) is found between the brake pedal pad (yellow arrow, inside vehicle) and output rod (red arrow, under vehicle). In either case, the pedal ratio is calculated using the same equation. (Randall Shafer)*

are now becoming more commonplace. Regardless of its construction, the pad should be large enough that the driver will not miss the pedal in a panic, small enough that it won't get hit by accident, and textured enough to prevent the foot from slipping off in the heat of battle.

**Fulcrum**

The *fulcrum* is found on the opposite end of the brake pedal assembly from the brake pedal pad. This is the pivot point for the moving components of the brake pedal assembly. Usually it's nothing more than a steel pin riding in a self-lubricating bronze bushing.



**Ideally, the brake pedal arm should not bend or deflect during use. To make the arm as stiff as possible, it can be shaped like an I-beam or can be boxed along its entire length. This pedal simply uses extremely thick steel for its construction—crude, but effective. (Randall Shafer)**

in-between. In some racing applications the fulcrum is placed between the pad and the output rod, but the concept is still the same.

Due to the large leg forces a driver may be capable of applying, the brake pedal arm must be structurally sound to prevent deformation or collapse during severe use. For this reason, it's usually designed to resemble an I-beam in cross-section with webbing often added for additional strength.

**Brake Switch**

The final component of the brake pedal assembly is the *brake switch*. This is the device used to illuminate the tail lamps of the vehicle when the brakes are


applied. In most applications, it consists of a mechanical plunger on/off switch actuated by the brake pedal arm, but in some custom applications it's common to have a pressure-actuated switch mounted in one of the master cylinder hydraulic lines.

There are many mechanical switches in use that allow you to adjust the plunger mechanism. In general, they should never be modified once they leave the factory. However, if you are changing other aspects of the apply system, it may be necessary to adjust the threaded mechanism to only illuminate the brake lamps when the driver applies the brakes.

After adjusting the brake switch, it's a good idea to put the vehicle on jack stands and turn each of the road wheels by hand, since an over-adjusted brake switch can result in continuous brake drag. If the wheels are more difficult to rotate than before the adjustment, chances are the switch needs to be returned to its original position.

**OEM Brake Pedals**

The brake pedal arm geometry (the location of the output rod relative to the brake pedal pad and the fulcrum) defines the pedal ratio. Note that this relationship holds true regardless of the location of the output rod relative to the fulcrum:

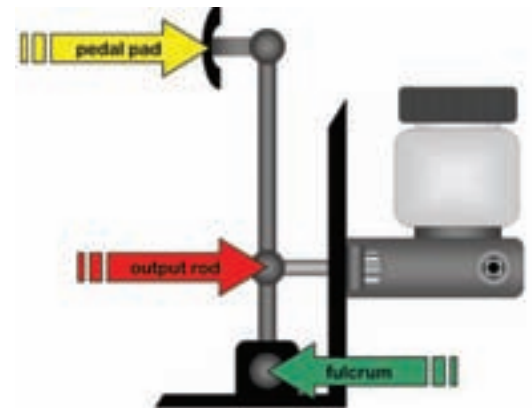

**The brake pedal ratio is calculated by dividing the linear distance from the brake pedal pad to the fulcrum by the length from the output rod to the fulcrum. The larger the difference between the two distances, the more gain the brake pedal provides.**



**If your vehicle is equipped with a vacuum booster, the brake pedal output rod is most likely attached to the brake booster with a clevis joint. Shown here sticking out of the back side of the booster, the eyelet fits around a pin on the brake pedal arm, mechanically coupling the two components together. (Delphi Corporation)**

**Output Rod**

The *output rod* transmits the brake pedal output force from the brake pedal assembly to the next device in the brake system (typically a brake booster of some sort). Since it must swing through an arc as it travels, it's usually located with a clevis bracket or, in racing applications, a spherical bearing, to allow for an angular misalignment between the two adjacent components.

**Brake Pedal Arm**

The *brake pedal arm* is the largest component in the brake pedal assembly. Its function is to locate the brake pedal pad at one end, the fulcrum at the opposite end, and the output rod somewhere



**Although many brake switches employ a threaded mount for simple adjustment, this doesn't mean that you should tamper with its setting. The adjustment feature is typically used for manufacturing flexibility at the vehicle assembly plant and not for tweaking later. (Randall Shafer)**