

TABLE OF CONTENTS



Biography	5	Brake Force and Corner Weight	37
Acknowledgments	5	Perfect Balance	38
Dedication	6	Static Weight Distribution	39
Foreword	6	The Second Law of Motion	39
Introduction	7	Dynamic Weight Distribution	40
 		The Benefits of Perfect Balance	41
Chapter 1: Energy Conversion	9	Front Brake Bias	43
The Conservation of Energy	9	Rear Brake Bias	43
Where Energy Comes From	10	Measuring Brake Balance	44
Friction	10	Changing Brake Balance	44
Kinetic Energy	11	 	
Potential Energy	13	Chapter 5: Pedals, Boosters	
Energy Transformation	14	and Master Cylinders	46
Energy and the Brake System	14	Brake Pedal Components	46
Calculating Brake System Temperature	15	OEM Brake Pedals	47
Importance of Brake Sizing	15	Racing Brake Pedals	48
 		Brake Boosters	48
Chapter 2: Tires Stop the Car	18	Vacuum Boosters	48
The First Law of Motion	18	Hydraulic Boosters	50
Brake Forces	18	Master Cylinders	50
Tire Slip	19	Master Cylinder Selection	52
How Brake Forces are Generated	20	Rear Brake Pressure Reduction	54
The Mu-Slip Curve	22	Balance Bars	54
Choosing the Best Tires	24	Proportioning Valves	55
Calculating Maximum Deceleration	25	 	
 		Chapter 6: Brake Fluid	58
Chapter 3: Brake System Design	27	Brake Fluid 101	58
Driver Applied Force	27	FMVSS116	58
Brake System Overview	28	Dry Boiling Point	60
Brake Corner Gain	33	Wet Boiling Point	61
Summing Forces	34	Water Adsorption	61
Overall Brake System Gain	34	DOT Ratings	61
Calculating Deceleration	34	Brake Fluid Compatibility	64
Calculating Stopping Distance	34	Brake Fluid Maintenance	64
Brake System Modifications	35	Brake Bleeding	65
Chapter 4: Brake Balance	37	Chapter 7: Brake Lines and Hoses	69

TABLE OF CONTENTS



Hydraulic Circuit Design	69		
Brake Lines	70		
Flare Fittings	70		
Brake Hoses	71		
Banjo Fittings	72		
Stainless Steel Brake Hoses	73		
Chapter 8: Brake Calipers	76	Chapter 11: Sports Car Brake Upgrade	118
Hydraulic Gain	76	The Vehicle	119
Caliper Components	76	The Objective	119
Taper Wear	79	Picking the Right Parts	119
Piston Count	81	Bolting Them On	121
Caliper Mounting	82	The Results	124
One-Piece (Monoblock) Calipers	84		
Two-Piece Calipers	84	Chapter 12: Racecar Brake Upgrade	126
Knockback	84	The Vehicle	127
		The Objective	127
Chapter 9: Brake Pads	88	Front Brake Upgrade	127
Brake Pad Terminology	88	Rear Brake Upgrade	129
Coefficient of Friction	90	Apply System Upgrade	131
Coefficient of Friction Stability	91	Hoses, Fluids, and Pads	132
Brake Pad Fade	91	The Results	132
Friction Material Categories	92		
Friction Material Chemistries	93	Chapter 13: Muscle Car Brake Upgrade	133
Friction Mechanisms	96	The Vehicle	133
Brake System Break-In	97	The Objective	134
		Drum Brakes 101	134
Chapter 10: Brake Rotors	100	Picking The Right Parts	134
A Rotor Refresher	100	Bolting Them On	135
Rotor Terminology	101	Buttoning it Up	138
Effective Radius	103	The Results	138
Rotor Sizing	103		
Static Weight and Rotational Inertia	103	Chapter 14: Hot Rod Brake Upgrade	139
Rotor Cooling	104	The Vehicle	139
One-Piece (Fixed) Rotors	107	The Objective	139
Two-Piece (Floating) Rotors	107	Front Brake Upgrade	139
Solid Rotors	109	Brake Pedal Considerations	140
Vented Rotors	110	Master Cylinder Upgrade	142
Cross-Drilled Rotors	111	Brake Line and Proportioning	
Slotted Rotors	112	Valve Installation	142
Rotor Inspection	113	Brake Hoses	143
Thickness Variation	115	Brake Fluid Selection	143
		Parking Brake Installation	144
		The Results	144



BRAKE CALIPERS



While calipers need to convert hydraulic fluid pressure into clamp force, they also must look good doing it. A little advertising never hurts either. Can you guess the manufacturer of this caliper? (Randall Shafer/Baer)

In recent years, brake calipers have transformed into a prominent automotive accessory for the image-conscious consumer. Yellow, red, silver, black, and even bright gold examples can be found on the front and/or rear axles of many performance vehicles. Caliper bodies have even been converted into miniature billboards for the caliper manufacturers themselves.

While these new caliper trends are pleasing to the eye, the basic role of the caliper has remained unchanged since its inception. The caliper must simply convert

the hydraulic fluid pressure generated in the master cylinder into a linear mechanical clamping force against the brake pads. At the same time, the caliper will usually locate the brake pads and supports the torque generated by the brake rotor, but these are secondary functions.

Hydraulic Gain

As you have already learned, the caliper clamp force can be calculated based upon the brake fluid pressure generated by the master cylinder and the inboard caliper piston area as follows:

$$\text{Caliper clamp force (lb)} = \text{master cylinder pressure (psi)} \times \text{effective caliper piston area (in}^2\text{)}$$

Note that although it wasn't mentioned explicitly back in Chapter 3, the *effective caliper piston area* is equal to the inboard caliper piston area multiplied by two.

Based on this relationship, it's common to select calipers and master cylinders in such a way as to amplify the force being applied to the master cylinder piston. Calculated much like the brake pedal ratio, the hydraulic gain of the system is equal to the effective caliper piston area divided by

the master cylinder piston area. A more detailed description of hydraulic gain can be found in the sidebar, but in summary, the hydraulic gain can be increased by reducing the master cylinder area or by increasing the effective caliper piston area.

Caliper Components

It has already been stated that the caliper functionally resembles a common master cylinder, but in order to fit around the spinning rotor it must be shaped like a C-clamp. This isn't necessarily a good thing, as the clamping force generated at the open end of the caliper will always attempt to spread the caliper body apart. This distorts the caliper body, which exaggerates the P-V relationship. In short, more caliper deflection results in more brake pedal travel.

Two significant mechanical attributes of a caliper are its *stiffness* and its *strength*. Not to be used interchangeably, stiffness indicates how much deflection a caliper exhibits for a given amount of clamp force, while strength is a measure of the absolute force that can be sustained before failure of the caliper. Consequently, high stiffness is desired for good pedal feel while high strength is required for mechanical integrity.


Body

The *caliper body* is typically made of cast iron in production vehicles. It locates the piston and supports the clamp force exerted on the brake pads. While cast iron is acceptable from stiffness and strength perspectives (especially at elevated temperatures), its weight makes it undesirable



Caliper sizing and selection is generally a function of the required hydraulic gain, with larger calipers providing more output than smaller calipers. For this reason, calipers like this eight-piston monster designed for the Hummer H2 would be complete overkill on a smaller, lighter vehicle. (Randall Shafer/StopTech)

BRAKE CALIPERS

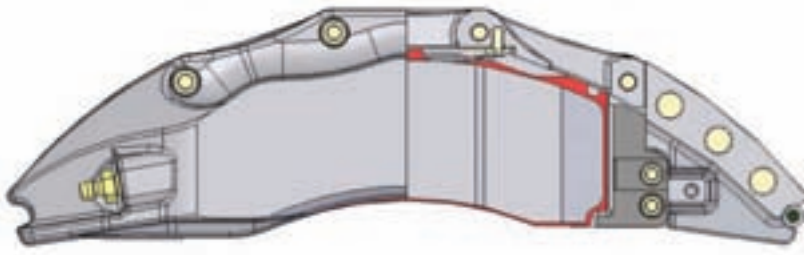

Caliper strength and stiffness are two key characteristics for optimum performance. Recent advances in computer modeling and simulation have allowed for significant improvements in both of these areas without the penalty of increased weight. (StopTech)



The basic caliper structure consists of body sections and bridge sections. In some applications, these may be discrete components assembled together. In the case of this early Porsche 911 Turbo caliper, two piston housings are bolted to two bridge sections to finalize the caliper assembly. (Randall Shafer)

Hydraulic Gain Example

If a vehicle was designed with a 0.75-inch-diameter master cylinder piston and a 2.00-inch-diameter caliper piston, one could calculate their effective areas as follows:


	Diameter (in)	Inboard Area (in ²)	Effective Area (in ²)
Master cylinder	0.75	n/a	0.44
Caliper	2.00	3.14	6.28

Recalling from the body text, the hydraulic gain of the brake system is simply the effective area of the caliper divided by the effective area of the master cylinder, or in equation form:

$$\text{Hydraulic gain (unitless)} = \frac{\text{effective caliper piston area (in}^2\text{)}}{\div \text{master cylinder piston area (in}^2\text{)}}$$

Consequently, the hydraulic gain of this system would be 14.2:1 (6.28 square inches divided by 0.44 square inches). In other words, for every pound of force applied to the master cylinder piston, 14.2 pounds of clamp force is generated by the caliper.

The hydraulic relationship also dictates that the linear travel experienced by the master cylinder piston will be 14.2 times greater than the linear travel experienced by the caliper piston relative to the caliper body. For example, if the caliper piston required 0.010 inches of travel to overcome compliance, the master cylinder piston would need to travel approximately 0.142 inches (14.2 times as far) to accommodate the P-V need.

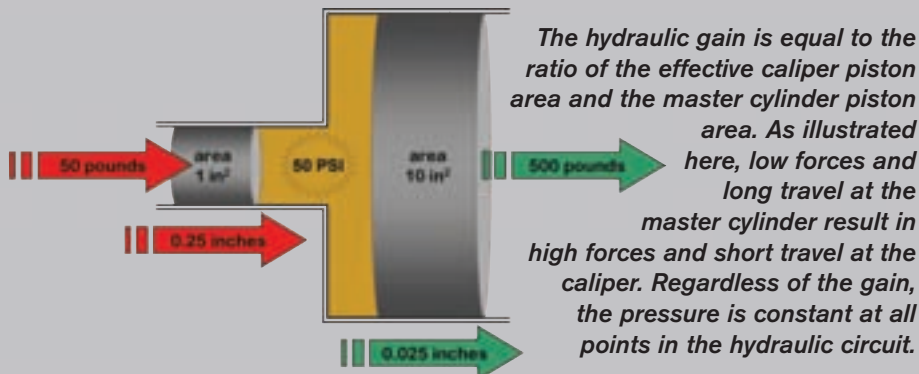

in performance applications. Consequently, aluminum alloys are employed when circumstances dictate the lowest weight possible (in fact, aluminum caliper bodies are nearly universal on modern high-performance vehicles), but their reduced stiffness can lead to excessive caliper deflection without appropriate design countermeasures.

The body consists of three main parts: an inboard body section (which almost always contains at least one piston bore), an outboard body section (which may or may not contain additional piston bores), and a bridge, which connects the two. In some applications, calipers can be fabricated from three separate components, but most often times are combined in a number of creative ways.

Bridge Reinforcement

In order to facilitate caliper inspection and brake pad replacement without caliper removal, it's common to have large openings in the caliper bridge. Unfortunately, these openings can greatly reduce the stiffness of the caliper, resulting in poor brake pedal feel. The term *open caliper* is often used to describe this type of arrangement.

Consequently, select manufacturers implement an auxiliary *bridge reinforcement* to regain the stiffness lost by open caliper design. This component is not required with *closed calipers* where pad